

## POWER RATING

Model	Engine Speed rev/min	Type of Operation	Engine Power	
			kWm	Ps
GV158TIS	1800	Prime Power	270	367
		Standby Power	300	408
GV158TIF	1500	Prime Power	230	313
		Standby Power	253	344



Note : -. The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271.

\* Without cooling fan, inter cooler inlet water temperature 32

-. Ratings are based on ISO 8528.

**Prime power** available at variable load. The permissible average power out put (during 24h period) shall not exceed 70% of the prime power rating. No overload is permitted.

**Standby power** available in the event of a main power network failure. No overload is permitted.

## MECHANICAL SYSTEM

○ Engine Type	V-type 4 cycle, water cooled
	Turbo charged & intercooled (water to air)
○ Combustion type	Stoichiometric, Premixed and spark ignited
○ Cylinder Type	Replaceable wet liner
○ Number of cylinders	8
○ Bore x stroke	128(5.04) x 142(5.59) mm(in.)
○ Displacement	14.618 (892.05) lit.(in <sup>3</sup> )
○ Compression ratio	10.5 : 1
○ Firing order	1-5-7-2-6-3-4-8-1
○ Ignition timing	14° BTDC
○ Compression pressure	Above 28 kg/cm <sup>2</sup> (398 psi) at 200rpm
○ Dry weight (Engine)	Approx. 1,230 kg (2,711 lb)
○ Dimension (Engine)	1,587 x 1,238 x 1,455 mm
(LxWxH)	(62.5 x 48.7 x 57.3 in.)
○ Rotation	Counter clockwise viewed from Flywheel
○ Fly wheel housing	SAE NO.1
○ Fly wheel	Clutch NO.14

## MECHANISM

○ Type	Over head valve
○ Number of valve	Intake 1, exhaust 1 per cylinder
○ Valve lashes at cold	Intake 0.3mm (0.0118 in.)
	Exhaust 0.4mm (0.0157 in.)

## VALVE TIMING

	Opening	Close
○ Intake valve	24 deg. BTDC	36 deg. ABDC
○ Exhaust valve	63 deg. BBDC	27 deg. ATDC

## FUEL CONSUMPTION

○ Prime (Nm <sup>3</sup> /hr)	1,500 rpm	1,800 rpm
25%	28.8	34.3
50%	39.0	45.5
75%	48.2	57.6
90%	54.2	64.5
100%	58.4	68.8
○ Standby (Nm <sup>3</sup> /hr)	1,500 rpm	1,800 rpm
100%	63.2	72.5

## FUEL SYSTEM

○ Carburetor	Impco 200M Varifuel carburetor (2EA)
○ Gas regulator	Maxitrol RV61 (2EA)
○ Max. inlet pressure	1.0 psi at the engine inlet

## LUBRICATION SYSTEM

○ Lub. Method	Fully forced pressure feed type
○ Oil pump	Gear type driven by crankshaft
○ Oil filter	Full flow, cartridge type
○ Oil pan capacity	High level 31 liters ( 8.19 gal.)
	Low level 25 liters ( 6.60 gal.)
○ Lub. Oil	Refer to Operation Manual
	Low ash type(0.5wt%) natural gas engine oil
	API service grade CD or higher
	SAE 15W-40

## COOLING SYSTEM

○ Cooling method	Fresh water forced circulation
○ Water capacity	36 liters ( 9.51 gal.) (Engine only)
○ Pressure system	Max. 0.5 kg/cm <sup>2</sup> ( 7.1 psi)
○ Water pump	Centrifugal type driven by belt
○ Cooling fan	Blower, 915mm diameter, 7 blades Plastic
Loss power of fan	28PS(18.5kW) @ Eng. Speed 1,500 rpm 33PS(24.3kW) @ Eng. Speed 1,800 rpm
○ Thermostat	Wax – pellet type Opening temp. 71°C Full open temp. 85°C

## ELECTRICAL SYSTEM

○ Charging generator	24V x 45A alternator
○ Voltage regulator	Built-in type IC regulator
○ Starting motor	24V x 7.0kW
○ Battery Voltage	24V
○ Battery Capacity	200 AH (recommended)
○ Ignition controller	12 or 24V DC (min 8V DC at start, 32V DC max)

## IGNITION SYSTEM

○ Spark plug	NGK IFR7B-D, 0.4mm air gap Champion RC78PYP, 0.38mm air gap
○ Ignition controller	Altronic CPU-95 unit (24V DC)
○ Ignition coil	Altronic 501 061 blue epoxy individual coil
○ Trigger system	Magnetic pick-up sensor and trigger wheel and Hall-effect (0.5/ 0.5/ 1.0mm air gap)

## ENGINEERING DATA


○ Water flow	570 liters/min @ 1,500 rpm 680 liters/min @ 1,800 rpm
○ Heat rejection to coolant	55 kcal/sec @ 1,500 rpm 68 kcal/sec @ 1,800 rpm
○ Heat rejection to CAC	3.1 kcal/sec @ 1,500 rpm 4.7 kcal/sec @ 1,800 rpm
○ Inter cooler water flow	290 liters/min @ 1,500 rpm 340 liters/min @ 1,800 rpm
○ Air flow	18.5 m <sup>3</sup> /min @ 1,500 rpm 22.9 m <sup>3</sup> /min @ 1,800 rpm
○ Exhaust gas flow	30.0 m <sup>3</sup> /min @ 1,500 rpm 37.8 m <sup>3</sup> /min @ 1,800 rpm
○ Exhaust gas temp.	495 °C @ 1,500 rpm 520 °C @ 1,800 rpm
○ Radiator air flow	550 m <sup>3</sup> /min @ 1,500 rpm, 0.7kPa 650 m <sup>3</sup> /min @ 1,800 rpm, 1kPa
○ Max. permissible restrictions	-Intake system 220 mmH <sub>2</sub> O initial 635 mmH <sub>2</sub> O final -Exhaust system 600 mmH <sub>2</sub> O max.
○ Altitude Capability	1,000 m

## CONVERSION TABLE


in. = mm x 0.0394	lb/ft = N.m x 0.737
PS = kW x 1.3596	U.S. gal = lit. x 0.264
psi = kg/cm <sup>2</sup> x 14.2233	kW = 0.2388 kcal/s
in <sup>3</sup> = lit. x 61.02	lb/PS.h = g/kW.h x 0.00162
hp = PS x 0.98635	cfm = m <sup>3</sup> /min x 35.336
lb = kg x 2.20462	Nm <sup>3</sup> = SCF x 0.0283
Kg/hr = Nm <sup>3</sup> /hr x 0.732 (natural gas)	
Btu/ft <sup>3</sup> = MJ/m <sup>3</sup> x 26.8392 (natural gas)	
kPa = 101.97 mmH <sub>2</sub> O = 0.01 bar	

# GV158TI GEN-PACK

## Dimensions : Engine

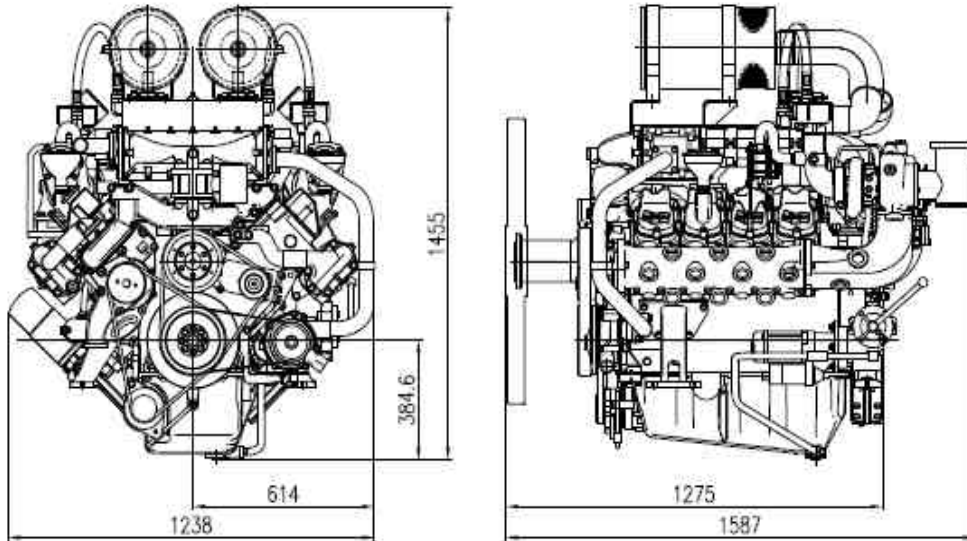

## Dimensions : Gen-pack

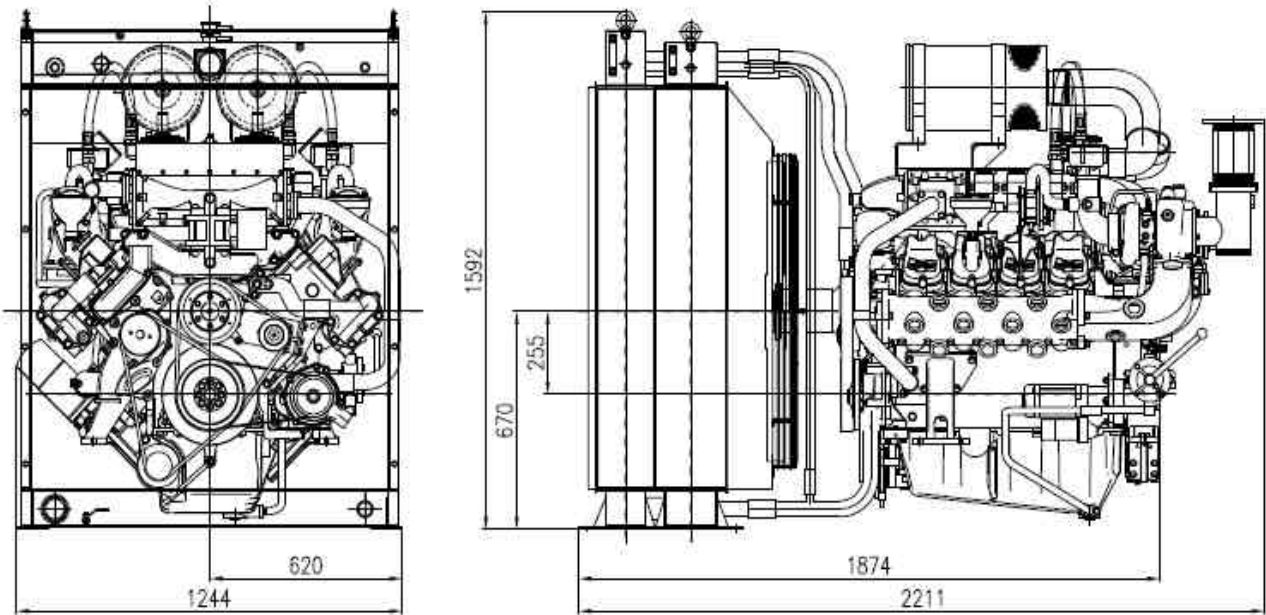

Specifications are subject to change without prior notice